

LUMEO CINEMA VAULT

MOTORIZED SCREEN WITH UHD WHITE GLASS FIBER FABRIC

The LUMEO CINEMA VAULT is a motorized projection screen designed to be fully recessed into a false ceiling, offering a discreet and elegant integration. This model is perfect for creating a home cinema ambiance or for professional environments requiring a high-end and aesthetic projection solution.

The screen is equipped with UHD Gray Fabric that delivers exceptional image quality, optimized for 4K and higher resolutions, ensuring faithful color reproduction and enhanced contrast. With its ultra-quiet motorized system and sleek design, the LUMEO CINEMA VAULT seamlessly blends into any space.



SPECIFICATIONS



Key Features:

Screen Type: Motorized in-ceiling screen with tab-tensioning system to ensure a perfectly flat projection surface without distortions.

Projection Fabric: UHD Gray Fabric: Gain: 0.8 – enhances contrast and reduces unwanted reflections.
Optimal Viewing Angle (2α): 160° – ensures clear visibility from all angles.

Thickness: 0.4 mm – durable and wrinkle-resistant for flawless visual presentation.
Resistant to humidity, mold, fire-retardant, and designed for long-term use.
Optimized for all types of projectors, including UHD/4K models.


Black Drop: Includes a 30 cm black drop, providing greater installation flexibility and optimal image positioning.

Casing: Made of white aluminum, robust yet lightweight, designed for discreet integration into false ceilings.
Elegant and modern finish, blending seamlessly into any interior design.

Motorization: A-OK tubular motor, reliable and ultra-quiet for smooth and discreet operation.
Thermal protection system, extending the motor's lifespan.
Backed by a 5-year warranty for maximum peace of mind.

Control System: Wireless remote control included, with an operational range of up to 50 meters.
Compatible with RS485/232 control systems and dry contact interfaces, ensuring integration into smart home setups.

DIMENSIONS

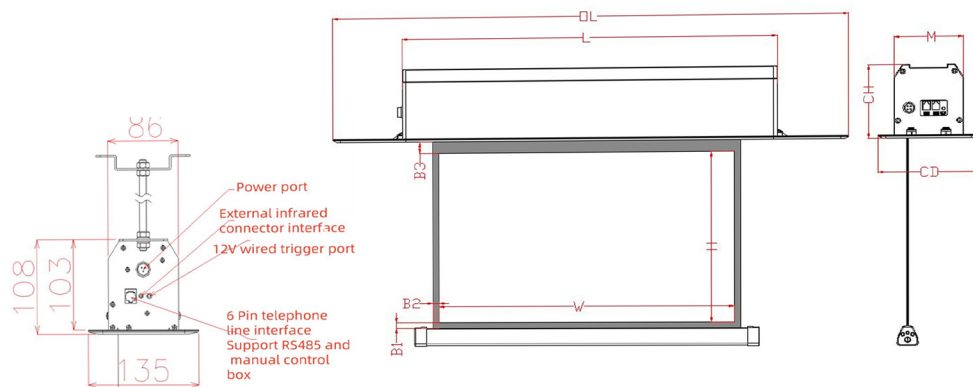

Format/Size(inch)		Viewing area (mm)		Black border (mm)			Dimension (mm)			Size of slot (mm)		Packing size (mm)			G.W (KG)
		H	W	B1	B2	B3	OL	CH	CD	L	W	L	W	H	
16:9	72"	900	1600	30	30	600	2042	109	135	2012	110	1900	193	162	13.50
	84"	1043	1854	30	30	600	2296	109	135	2266	110	2154	193	162	14.00
	92"	1143	2032	40	40	600	2494	109	135	2464	110	2352	193	162	15.00
	100"	1243	2210	40	40	600	2672	109	135	2642	110	2530	193	162	15.50
	110"	1371	2438	40	40	600	2900	109	135	2870	110	2758	193	162	17.00
	120"	1500	2667	40	40	600	3129	109	135	3099	110	2987	193	162	23.00
	135"	1686	2997	60	60	600	3534	125	160	3504	135	3378	222	187	26.00
	150"	1871	3327	60	60	600	3864	125	160	3834	135	3708	222	187	29.00